



Kit 1321

KIA Amanti, 4-dr Sedan, 03-09 / *04-09



KIA Opirus, 4-dr Sedan, 03-09

*North America



480R
754



480



750




THULE[®]
SWEDEN


ISO 11154-E

Kit






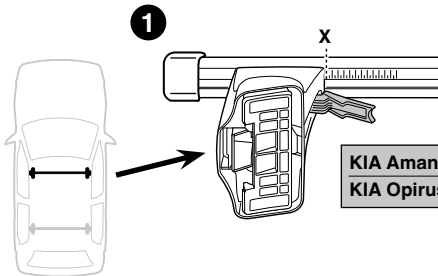



	X
KIA Amanti, 4-dr Sedan, 03-09 / *04-09	41,5
KIA Opirus, 4-dr Sedan, 03-09	41,5

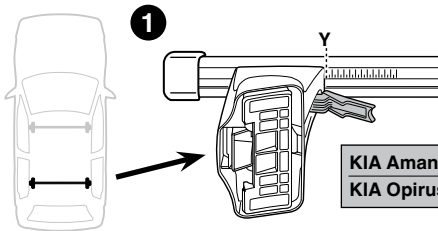

	Y
KIA Amanti, 4-dr Sedan, 03-09 / *04-09	39,5
KIA Opirus, 4-dr Sedan, 03-09	39,5

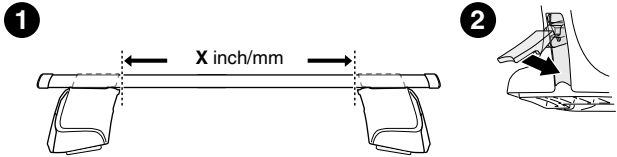

	X inch	X mm
KIA Amanti, 4-dr Sedan, 03-09 / *04-09	42"	1066 mm
KIA Opirus, 4-dr Sedan, 03-09	42"	1066 mm












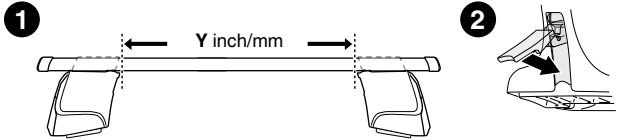



	Y inch	Y mm
KIA Amanti, 4-dr Sedan, 03-09 / *04-09	41 1/8"	1046 mm
KIA Opirus, 4-dr Sedan, 03-09	41 1/8"	1046 mm

4

KIA Amanti, 4-dr Sedan, 03-09 / *04-09




KIA Opirus, 4-dr Sedan, 03-09

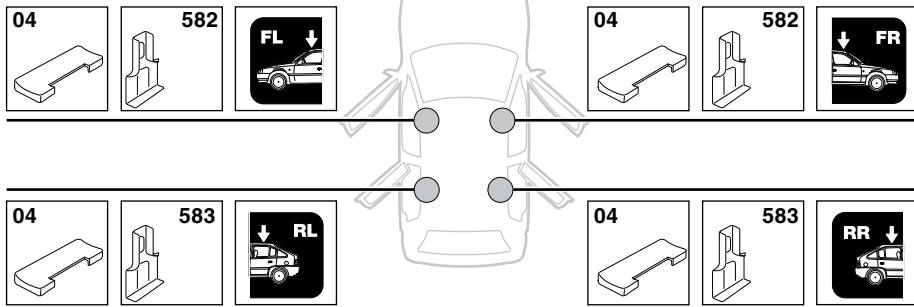

5



	X mm	Y mm	X inch	Y inch
KIA Amanti, 4-dr Sedan, 03-09 / *04-09	370 mm	700 mm	14 5/8"	27 1/2"
KIA Opirus, 4-dr Sedan, 03-09	370 mm	700 mm	14 5/8"	27 1/2"

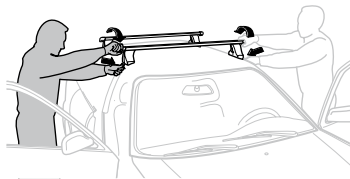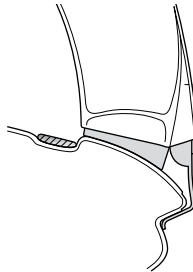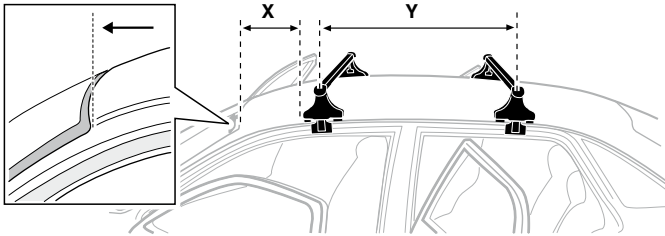

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pielieciet pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťta bagażníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın

中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชั้้นในแบบสลับ



6



480R/754




480

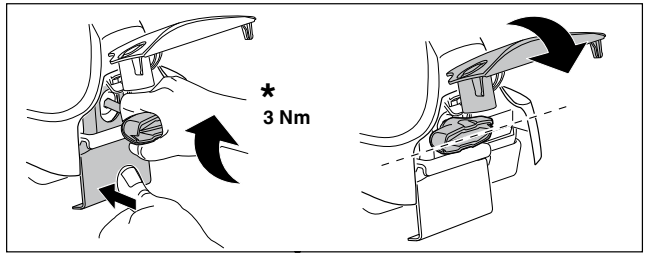



*
3 Nm




*

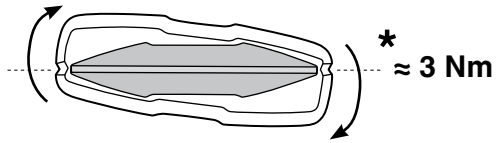



*
≈ 3 Nm

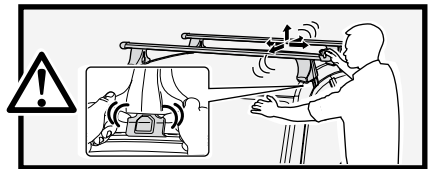


750

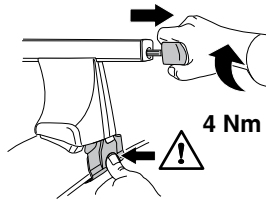


4 Nm




i

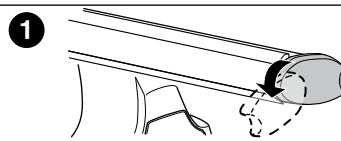


1

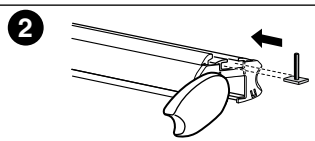


2




i

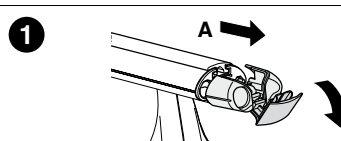


1

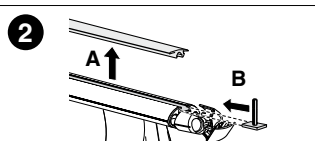


2



i




1



2



THULE
SWEDEN
**ONE
KEY
SYSTEM**

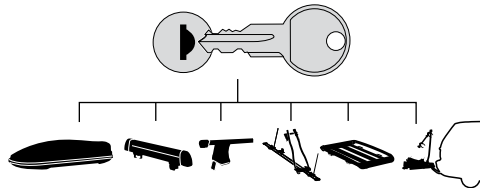

- 544 (x4)
- 596 (x6)
- 588 (x8)
- NA 510 (x10)
- EUR 452 (x12)
- ASIA



WW ▶ Thule Sweden AB, Box 69, 330 33 Hillerstorp, SWEDEN
NA ▶ Thule Inc., 42 Silvermine Road, Seymour, Connecticut 06483, USA

info@thule.com
customer.service@thule.com

www.thule.com